

# AN217

## Migrating from FM24CL32 to FM24CL64B

**Author:** Girija Chougala

**Associated Project:** No

**Associated Part Family:** FM24CL32, FM24CL64B

**Software Version:** None

**Related Documents:** For a complete list, [click here](#)

AN217 discusses the key differences that need to be considered when migrating from FM24CL32 to FM24CL64B. FM24CL32 is now obsolete and this application note explains how FM24CL64B is a replacement for FM24CL32.

### Introduction

FM24CL64B, a 64-Kbit I<sup>2</sup>C F-RAM™, is a replacement device for the FM24CL32, a 32-Kbit I<sup>2</sup>C F-RAM, which is now obsolete. The two devices are identical in terms of pinout, package composition and dimensions, Write Protection operation, and address pin functionality. This application note discusses the key differences between the two devices that need to be considered when migrating from FM24CL32 to FM24CL64B.

### Backward Compatible

From a software point of view, the two devices are compatible. Aside from the additional address bit to access twice the memory, the two devices are read / write compatible. Both devices use the same two-byte address. Remember that the 64-Kbit device address wraps at 0x1FFF while the 32-Kbit wraps at 0x0FFF. For systems that use a single FM24CL32 device, the transition to the FM24CL64B could be as straightforward as changing your firmware to hold the address bit A12 LOW during SRAM read/writes. For systems that use two FM24CL32s, firmware needs to be modified to use the address bit A12 to access the full 64-Kbit memory. A memory write sequence for the FM24CL64B device is shown in [Figure 1](#).


For all applications, the FM24CL64B device can be considered a superset of the FM24CL32. The FM24CL64B datasheet adds improved power-up and power-down ramp rate specifications of 30 μs / V and a power-up to first access specification of 1 ms.

[Table 1](#) shows the compatibility chart of FM24CL32 and FM24CL64B. For a detailed comparison, see [Table 3](#).

Table 1. Compatibility Chart

FM24CL32 Feature or Spec	Is FM24CL64B compatible?
Package	Yes
Pinout	Yes
Temperature Range	Yes
Operating Voltage	Yes
Operating Current	Yes
Standby Current	Yes
Read / Write Function	Yes
Timing / Frequency	Yes
Data Retention	Refer to <a href="#">Table 3</a>
Endurance	Yes

Figure 1. FM24CL64B Write Sequence

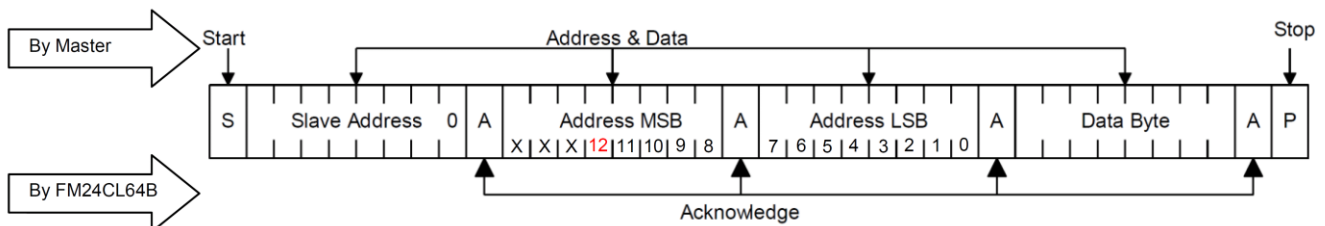

## Ordering Part Numbers

Table 2 gives the recommended FM24CL64B ordering part numbers that correspond to the now obsolete FM24CL32 ordering part numbers.

Table 2. Recommended Ordering Part Numbers for Migration

FM24CL32		FM24CL64B		Comments
Ordering Part Number	Status	Ordering Part Number	Status	
FM24CL32-G	Obsolete	FM24CL64B-G	In production	No hardware change is required. Software change is required (refer to the <a href="#">Backward Compatible</a> section for details).
FM24CL32-GTR		FM24CL64B-GTR		

## Comparison of FM24CL32 and FM24CL64B

Table 3 gives a detailed comparison of the two devices.

Table 3. Detailed Comparison

	FM24CL32	FM24CL64B	Comments
Package Types	-G	-G, -DG	Identical "green" SOIC package. FM24CL64B is also offered in "green" TDFN package.
Package Outlines	SOIC-8	SOIC-8, TDFN-8	Identical outline and board footprint for SOIC. FM24CL64B is also offered in TDFN package.
Pinout	-	-	Identical
Temperature Range	-40 °C to +85 °C	-40 °C to +85 °C	Identical
Operating Voltage Range	2.7 V to 3.6 V	2.7 V to 3.65 V	Compatible
Active Supply Current	70 µA @ 100 kHz 250 µA @ 400 kHz 600 µA @ 1 MHz	100 µA @ 100 kHz 170 µA @ 400 kHz 300 µA @ 1 MHz	FM24CL64B offers lower active current at frequencies of 400 kHz and above
Standby Current	12 µA	6 µA	FM24CL64B has lower standby current
Read / Write Function	-	-	Identical 2-byte addressing, Identical Slave IDs, Identical device select bits, A12 must be low
Clock Frequency	1 MHz	1 MHz	Identical
Data Retention	45 years (+85 °C)	10 years (+85 °C) 38 years (+75 °C) 151 years (+65 °C)	Data retention is lower
Endurance (Write/Read Cycles)	Unlimited	1E+14	FM24CL64B's endurance is large enough to be considered as unlimited for all practical applications. For a 64-byte loop, at 1 MHz, FM24CL64B's endurance is 1700 years.
V <sub>DD</sub> Power-Up Ramp Rate (t <sub>VR</sub> )	50 µs / V	30 µs / V	Improved specification in FM24CL64B
V <sub>DD</sub> Power-Down Ramp Rate (t <sub>VF</sub> )	100 µs / V	30 µs / V	Improved specification in FM24CL64B
Power-Up to First Access (t <sub>PU</sub> )	5 ms	1 ms	Faster power-up to first access in FM24CL64B

## Critical Considerations

You should consider all the parameter differences mentioned in [Table 3](#) during the migration to FM24CL64B. This section discusses the critical differences. System designers should also review the [datasheet](#) when migrating to the new part.

### Read / Write Function

The FM24CL64B device has an extra address bit, A12, to support the additional 32-Kbit memory when compared to the FM24CL32. Setting A12 to a 0 level will address the 32-Kbits of your current FM24CL32 application. Setting A12 to a 1 level will address the additional 32-Kbits of the FM24CL64B. Note that roll over will not happen at 0x0FFF in FM24CL64B; instead it will roll over at 0x1FFF.

## Summary

AN217 discussed the differences between FM24CL64B and FM24CL32 that need to be considered during migration to the FM24CL64B.

## Related Documents

### Datasheet

[FM24CL64B: 64-Kbit \(8 K × 8\) Serial \(I<sup>2</sup>C\) F-RAM datasheet](#)

## Document History

Document Title: Migrating from FM24CL32 to FM24CL64B - AN217

Document Number: 001-86823

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	3944550	GVCH	03/26/2013	New Spec.
*A	4281483	MEDU	03/07/2014	<p>Updated to Cypress Template.</p> <p>Added data retention spec to FM24CL64B at 85 °C.</p> <p>Updated "V<sub>DD</sub> Power-down Ramp Rate" for FM24CL64B from 100 µs / V to 30 µs / V.</p> <p>Added "V<sub>DD</sub> Power-down Ramp Rate" and "V<sub>DD</sub> Power-up Ramp Rate" to FM24CL32.</p> <p>Updated "Power-up to First Access" for FM24CL64B from 10 ms to 1 ms.</p> <p>Added "Power-up to First Access" for FM24CL32.</p> <p>Removed V<sub>IH</sub>(max) spec from Table 2.</p>
*B	4498651	GVCH	09/15/2014	<p>Changed title from "Differences between FM24CL32 and FM24CL64B" to "Migrating from FM24CL32 to FM24CL64B."</p> <p>Updated abstract.</p> <p>Added "Ordering Part Numbers" section.</p> <p>Added title for Table 3.</p> <p>Added "Related Documents" section.</p>

## Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

Automotive	<a href="http://cypress.com/go/automotive">cypress.com/go/automotive</a>
Clocks & Buffers	<a href="http://cypress.com/go/clocks">cypress.com/go/clocks</a>
Interface	<a href="http://cypress.com/go/interface">cypress.com/go/interface</a>
Lighting & Power Control	<a href="http://cypress.com/go/powerpsoc">cypress.com/go/powerpsoc</a> <a href="http://cypress.com/go/plc">cypress.com/go/plc</a>
Memory	<a href="http://cypress.com/go/memory">cypress.com/go/memory</a>
PSoC	<a href="http://cypress.com/go/psoc">cypress.com/go/psoc</a>
Touch Sensing	<a href="http://cypress.com/go/touch">cypress.com/go/touch</a>
USB Controllers	<a href="http://cypress.com/go/usb">cypress.com/go/usb</a>
Wireless/RF	<a href="http://cypress.com/go/wireless">cypress.com/go/wireless</a>

### PSoC<sup>®</sup> Solutions

[psoc.cypress.com/solutions](http://psoc.cypress.com/solutions)

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

### Technical Support

[cypress.com/go/support](http://cypress.com/go/support)

PSoC is a registered trademark of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor    Phone : 408-943-2600  
198 Champion Court    Fax : 408-943-4730  
San Jose, CA 95134-1709    Website : [www.cypress.com](http://www.cypress.com)

© Cypress Semiconductor Corporation, 2013-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

This Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.