


REVISIONS					
Zone	REV	ECN	DESCRIPTION	DATE	APPROVED
	**	208023	NEW SPEC	03/02/04	
	*A	292852	Increase the character height of Ko (1.25) and corner relief part (0.40) of carrier tape.	11/28/04	

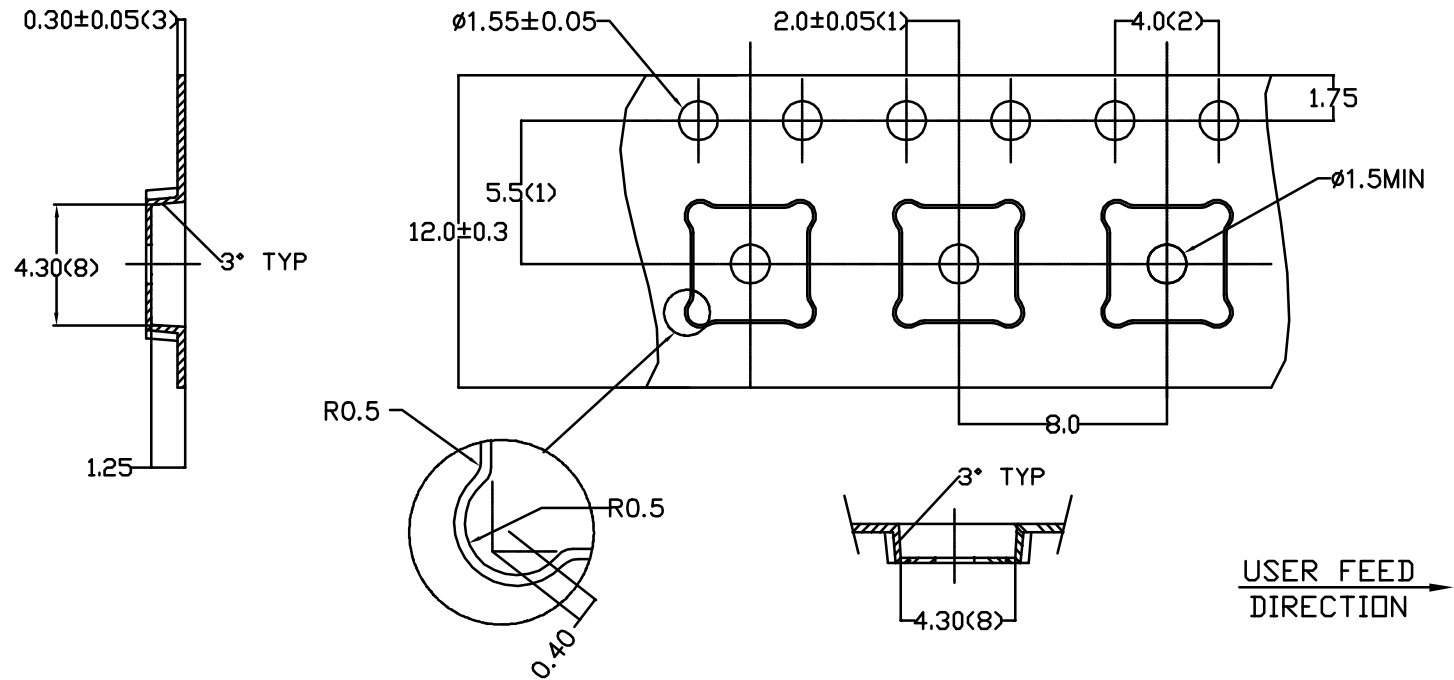

NOTES:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE AND FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ±0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
4. MATERIAL: CONDUCTIVE POLYSTYRENE
5. DIM IN MM
6. ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
7. UNLESS OTHERWISE SPECIFIED, TOLERANCE ±0.10
- (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET .
9. SURFACE RESISTIVITY LESS THAN OR EQUAL TO 1.0X10E9 OHMS/SQ.

$$A_0 = 4.30 \pm 0.10$$

$$B_0 = 4.30 \pm 0.10$$

$$K_0 = 1.25 \pm 0.10$$

USER FEED  
DIRECTION →

UNLESS OTHERWISE SPECIFIED		DESIGNED BY	DATE	 CYPRESS COMPANY CONFIDENTIAL
ALL DIMENSIONS ARE IN MILLIMETER STANDARD TOLERANCES IN		DRAWN	DATE	
DECIMALS	ANGLES	NQG	03/02/04	
JOK +	*	CHK BY	DATE	
JOKK *		APPROVED BY	DATE	TITLE
JOKKK *		APPROVED BY	DATE	CARRIER TAPE, GFN 4 X 4 MM
MATERIAL	SEE NOTE	SCALE	NTS	SIZE
FINISH				A
				PART NO.
				LF20CT
				DWG NO.
				51-52119
				REV
				*A
				SHEET 1 OF 1