
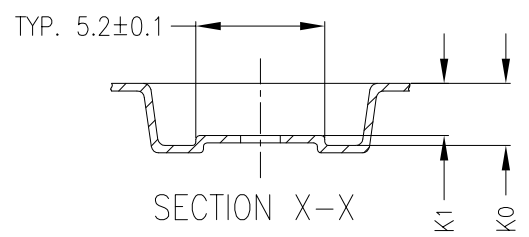


REVISIONS						
PAGE	ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
1	-	**	61343	NEW RELEASE	03/19/99	
1	-	*A	120696	Change title from 28LD SSOP Carrier Tape ( 209 mils) to Carrier Tape, SSOP 28 ( 209 mils), deleted Advantek p/n, complete revision ( change design)	10/24/02	
1	-	*B	3145472	CHANGE TITLE FROM CARRIER TAPE, SSOP 28 (209 MILS) TO CARRIER TAPE, SSOP 28 (209 MILS) (C-PAK) UPDATE DRAWING BASED ON SUPPLIER'S LATEST DRAWING CHANGE DRAWING TEMPLATE	01/18/11	QAD/KGL

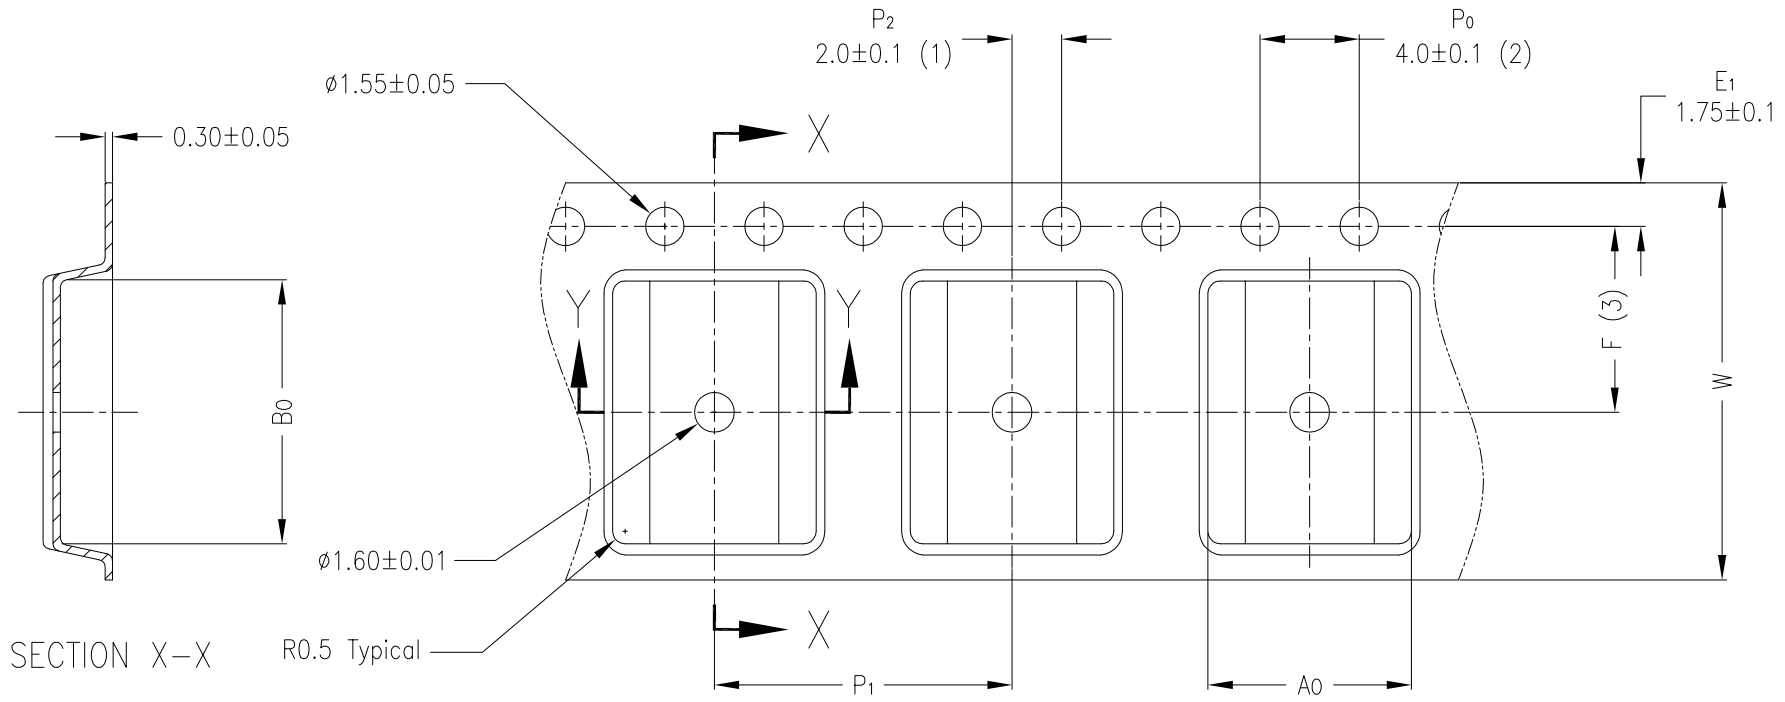

A <sub>0</sub>	8.20 ±0.1
B <sub>0</sub>	10.60 ±0.1
K <sub>0</sub>	2.50 ±0.1
K <sub>1</sub>	2.10 ±0.1
F	7.50 ±0.1
P <sub>1</sub>	12.00 ±0.1
W	16.00 ±0.3

- NOTES:
- (1) Measured from centerline of sprocket hole to centerline of pocket.
  - (2) Cumulative tolerance of 10 sprocket holes is ± 0.10.
  - (3) Measured from centerline of sprocket hole to centerline of pocket
  - 4 Material: Conductive Polystyrene
  - 5 Camber not to exceed 1mm in 100mm
  - 6 Supplier P/N: SSOP28-3 CL3 22B3 Lxx W16

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS STANDARD TOLERANCES ON:  DECIMALS                      ANGLES .X                      ± 0.10                      ± .XX                      ± 0.10 .XXX                      ±	DESIGNED BY	DATE
	DRAWN BY AQJ	DATE 01/18/11
	CHECKED BY AEL	DATE 01/18/11
	APPROVED BY QAD	DATE 01/18/11
MATERIAL SEE NOTES	APPROVED BY KGL	DATE 01/18/11
FINISH	APPROVED BY	DATE



TITLE  
CARRIER TAPE, SSOP 28 (209 MILS) (C-PAK)

SIZE A	PART NO. 028209CT	DWG NO 51-51100	REV *B
SCALED TO FIT		ENG'G REV	SHEET 1 OF 1

THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF CYPRESS SEMICONDUCTOR CORPORATION. THIS DRAWING IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT OF CYPRESS SEMICONDUCTOR CORPORATION.