




REVISIONS						
PAGE	ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
1	-	**	59946	NEW RELEASE	12/09/98	
1	-	*A	120091	Change title from 28LD TSOP Carrier Tape(Peak) to Carrier Tape, TSOP 28/TSOP 28 (R) / STSOP 32/ STSOP 32 (R), change p/n from Z28CTPK to Z28CT, added dims. and tolerance for major dims.	10/14/02	
1	-	*B	3072519	CHANGE DRAWING TEMPLATE ADDED "AND LOCATION ARE INTERCHANGEABLE." ON NOTE #10	10/27/10	QAD/UYO

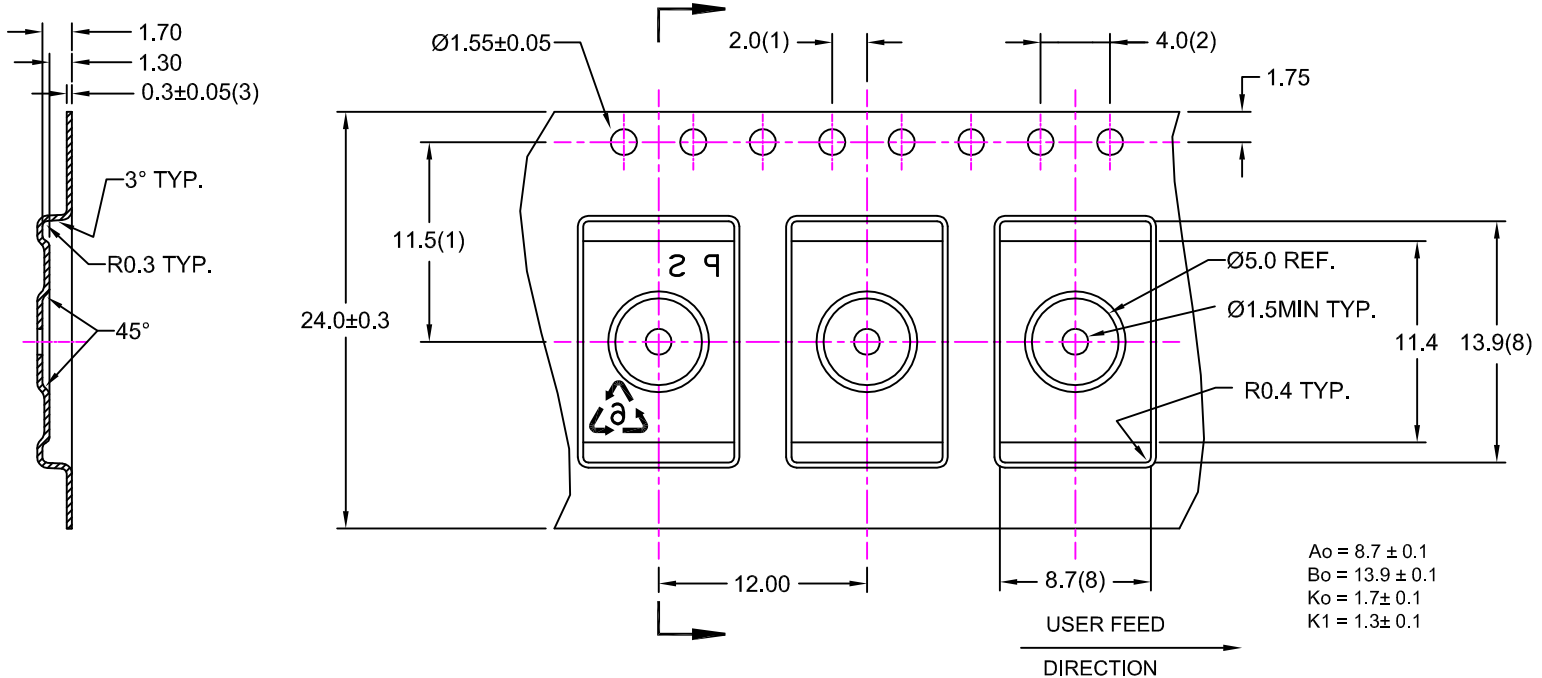

- NOTES:
- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE AND FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE
 - (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ± 0.20
 - (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
 4. MATERIAL: CONDUCTIVE POLYSTYRENE
 5. DIM IN MM
 6. ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
 7. UNLESS OTHERWISE SPECIFIED, TOLERANCE ± 0.10
 - (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET .
 9. SURFACE RESISTIVITY LESS THAN OR EQUAL TO 1.0×10^6 OHMS/SQ.
 10. MARKING ON THE BOTTOM AND LOCATION ARE INTERCHANGEABLE.

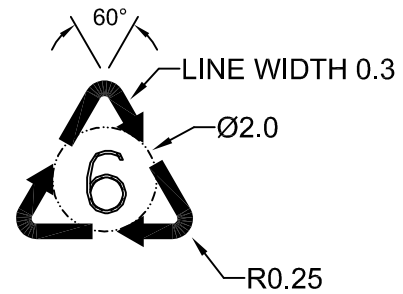

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS STANDARD TOLERANCES ON: DECIMALS .XX ± .XXX ± .XXXX ± MATERIAL SEE NOTE FINISH	DESIGNED BY	DATE	 CYPRESS Company Confidential	TITLE CARRIER TAPE, TSOP28/ TSOP 28 (R) / STSOP 32 / STSOP 32 (R)	SIZE	PART NO.	DWG NO	REV
	DRAWN BY	DATE			A	Z28CT	51-51095	*B
	CHECKED BY	DATE			SCALED TO FIT	ENG'G REV	SHEET 1	OF 1
	APPROVED BY	DATE						

THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF CYPRESS SEMICONDUCTOR CORPORATION. THIS DRAWING IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT OF CYPRESS SEMICONDUCTOR CORPORATION.