
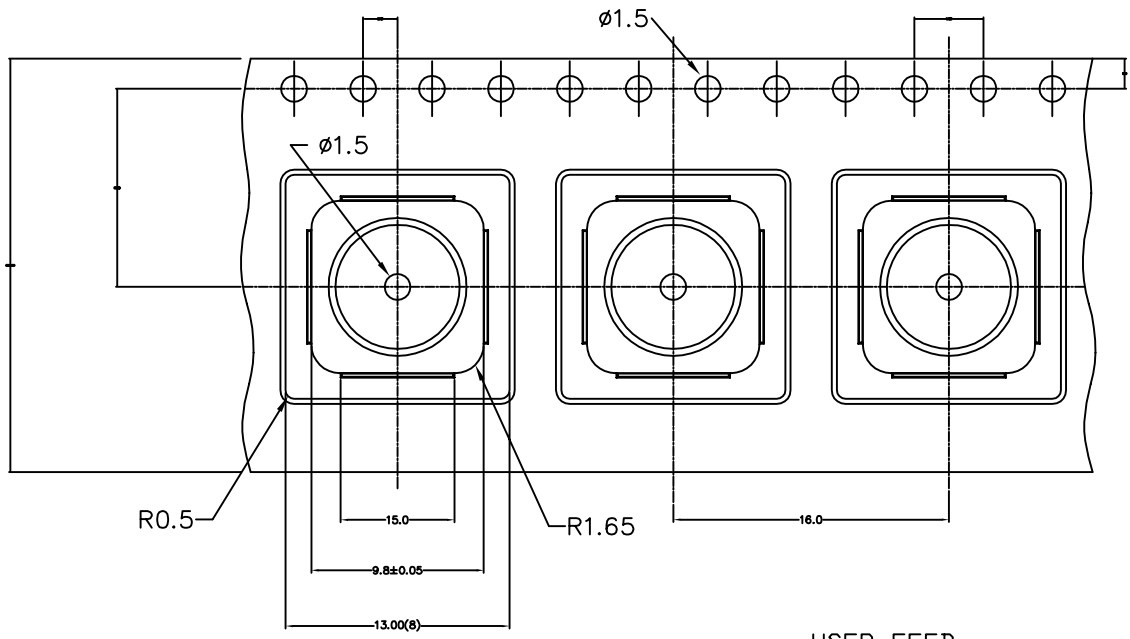


REVISIONS					
ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
	**	50201	NEW RELEASE	05/30/97	
	*A	117704	CHANGE TITLE FROM TQFP CARRIER TAPE (10X10X1.4MM) TO CARRIER TAPE, TQFP44/ASC64 (10X10X1.4MM) / COMPLETE REVISION	07/31/02	
	*B	3741737	CHANGE LOGO FROM CYPRESS SEMICONDUCTOR TO COMPANY CONFIDENTIAL	09/13/12	Z.JL

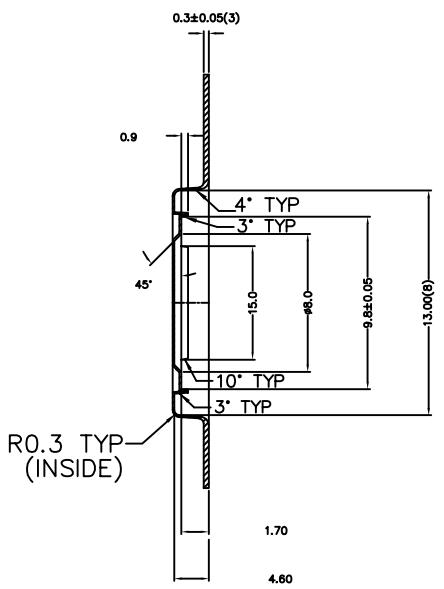

NOTES:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE AND FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ±0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
- 4. MATERIAL: CONDUCTIVE POLYSTYRENE
- 5. DIM IN MM
- 6. ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
- 7. UNLESS OTHERWISE SPECIFIED, TOLERANCE ±0.10
- (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET .
- 9. SURFACE RESISTIVITY 1.0X10E5 TO 1.0X10E9 OHMS/SQ.

$A_0 = 13.00 \pm 0.1$   
 $B_0 = 13.00 \pm 0.1$   
 $K_0 = 2.00 \pm 0.1$   
 $K_1 = 1.70 \pm 0.1$

UNLESS OTHERWISE SPECIFIED		DESIGNED BY	DATE		CYPRESS COMPANY CONFIDENTIAL		
ALL DIMENSIONS ARE IN INCHES STANDARD TOLERANCES UN		DRAWN	DATE		TITLE		
DECIMALS	ANGLES	XVC	09/13/12	CARRIER TAPE, TQFP44 / ASC64 (10X10X1.4MM)			
JXX ±	±	CHK BY	DATE	SIZE	PART NO.	DWG NO	REV
XXX ±		ZJL	09/13/12	A	A10X10X1.4CT	51-51050	*B
XXXX ±		APPROVED BY	DATE	SCALE 2.5: 1		SHEET 1 OF 1	
MATERIAL	SEE NOTE	QAD	09/13/12				
FINISH		KGL	09/13/12				