



Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

Failsafe Over-the-Air Update

Associated Part Family: CYW20734

This document describes Failsafe over-the-air (OTA) functionality and implementation. It is intended for engineers and developers who are working with the CYW20734 Cypress chip.

1 About This Document

1.1 Cypress Part Numbering Scheme

Cypress is converting the acquired IoT part numbers from Broadcom to the Cypress part numbering scheme. Due to this conversion, there is no change in form, fit, or function as a result of offering the device with Cypress part number marking. The table provides Cypress ordering part number that matches an existing IoT part number.

Table 1. Mapping Table for Part Number between Broadcom and Cypress

Broadcom Part Number	Cypress Part Number
BCM20734	CYW20734

1.2 Acronyms and Abbreviations

In most cases, acronyms and abbreviations are defined on first use. For a more complete list of acronyms and other terms used in Cypress documents, go to: <http://www.cypress.com/glossary>.

1.3 References

The references in this section may be used in conjunction with this document.

Document (or Item) Name	Number	Source
Cypress Items		
[1] <i>CYW20734 Single-Chip Bluetooth Transceiver for Wireless Input Devices Data Sheet</i>	20734-DS1xx-R	Cypress Developer Community
[2] <i>Over-the-Air throughput Classic Test Setup Application Note</i>	20734-AN3xx-R	Cypress Developer Community

2 IoT Resources

Cypress provides a wealth of data at <http://www.cypress.com/internet-things-iot> to help you to select the right IoT device for your design, and quickly and effectively integrate the device into your design. Cypress provides customer access to a wide range of information, including technical documentation, schematic diagrams, product bill of materials, PCB layout information, and software updates. Customers can acquire technical documentation and software from the Cypress Support Community website (<http://community.cypress.com/>).

3 Failsafe Overview

When the OTA update is complete the dynamic offset in the static section¹ must be updated to reflect the new dynamic offset. This is problematic because the static section can get corrupted if power goes out in middle of serial flash write transaction.

The solution is to create a failsafe section that contains a second, dynamic², section offset (DS2) and a magic number. If the magic number is valid, then the second dynamic section offset is the valid offset. If the magic number is not valid, then the original dynamic section offset in the static section is used.

The 8-byte magic number is located at 0x1FF4–0x1FFB (Table 1 and Figure 1 on page 3).

The 4-byte DS2 offset is located at 0x1FFC–0x1FFF (Table 1 and Figure 1 on page 3).

The magic number is **0xAA, 0x55, 0xF0, 0x0F, 0x68, 0xE5, 0x97, 0xD2**. If it is valid, then the 4-byte DS2 offset is valid.

When it is time to update the failsafe section offset, both DS1 and DS2 have valid firmware. However, if the failsafe section becomes corrupt while updating the DS2 offset, the valid DS1 firmware boots because the magic number is not valid.

4 Required Changes to Support Failsafe

4.1 Prerequisites

Wire-update is required to download the firmware to the chip.

4.2 Procedure

1. Read the magic number and verify that is correct (Read Magic 0x1FF4–0x1FFB).
 - a. If the magic number is valid (0xAA, 0x55, 0xF0, 0x0F, 0x68, 0xE5, 0x97, 0xD2), then DS2 is valid: update DS1.
If the magic number is *not* valid, update DS2.
2. Update DS2
 - a. Download the code to DS2 and verify that it is correct.
 - b. Erase the 4 KB sector in the failsafe section.
 - c. Write the 4-byte DS2 offset to location 0x1FFC.
 - d. Write the 8-byte magic number to location 0x1FF4.
3. Update DS1:
 - a. Download the code to DS1 and verify that it is correct.
 - b. Erase the 4 KB sector in the failsafe section.

Table 1. Memory Map

Section	Location		
Static	0x0000–0x0FFF		
Failsafe	0x1000–0x1FFF		
		Magic Number OFFSET	0x1FF4–0x1FFB
		Valid Magic Number values	0xAA, 0x55, 0xF0, 0x0F, 0x68, 0xE5, 0x97, 0xD2 (stored as a BYTE array)
		DS2 OFFSET	0x1FFC–0x1FFF (U16 little endian)
Volatile	0x2000–0x2FFF		
Volatile (back up)	0x3000–0x3FFF		

1. The static section contains information such as the Bluetooth device address and the location of the dynamic section.
 2. The dynamic section is primarily for configuration data, application software, and software patches.

Figure 1. Memory Map

Section	Start Address	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
		Static Section	0X0000	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0XFF00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Failsafe Section	0X1000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0X1FF0	—	—	—	—	Magic Number							DS2 Offset				
Volatile Section	0X2000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0X2FF0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
VS Backup	0X3000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	0X3FF0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Document History Page

Document Title: AN214872 - Failsafe Over-the-Air Update

Document Number: 002-14872

Rev.	ECN No.	Orig. of Change	Submission Date	Description of Change
**	-	-	04/17/2015	Initial release
*A	5450716	UTSV	09/27/2016	Updated to Cypress template Added Cypress part numbering scheme
*B	5882487	AESATMP9	09/13/2017	Updated logo and copyright.

Worldwide Sales and Design Support

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturers' representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

ARM® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)


Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.

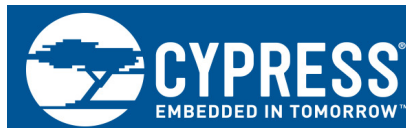

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2015-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1s) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.