



Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

Objective

This code example demonstrates how to use the 1.2-V Comparator and Analog Multiplexer Components to select the input voltage source.

Overview

This code example uses one 1.2-V Comparator to compare input voltages from two sources to internal reference. The firmware sequentially switches the input channels to the comparators' input and shows results of the voltage comparison using LEDs.

Requirements

Tool: PSoC® Creator™ 4.1 Update 1

Programming Language: C (GCC 5.4-2016-q2-update, MDK 5.06 update 5)

Associated Parts: PSoC 4000

Related Hardware: CY8CKIT-040

Hardware Setup

This example uses the kit's default configuration. Refer to the kit guide to ensure the kit is configured correctly.

Software Setup

None.

Operation

1. Plug the CY8CKIT-040 kit board into your computer's USB port.
2. Build the project and program it into the PSoC 4000 device. Choose **Debug > Program**. For more information on device programming, see PSoC Creator Help.
3. On the kit, connect VplusRed (P0[0]) and VplusBlue (P0[1]) to the Gnd terminal with jumper wires. Observe the OFF state of the on-board RGB LED.
4. Connect VplusRed or VplusBlue to the V3.3 or V5.0 terminal. Observe the LED's state depending on the voltage value of the VplusRed and VplusBlue pins: if the voltage on the input pin is greater than 1.2 V, then the corresponding LED turns ON; otherwise the LED turns OFF.

Note: You can use external variable voltage sources such as variable resistors to provide the input voltages for the Comparator.

Design and Implementation


This code example compares input voltages from two sources using one comparator. This is achieved by switching the input channels to the comparators' input with the Analog Multiplexer Component.

The 1.2-V Comparator is present in the Capacitive Sensing Delta-Sigma Modulator (CapSense® CSD) block. This comparator's functionality is present only in the PSoC 4000 family and is available only when the CapSense CSD block for Capacitive Sensing is not used.

The firmware sequentially switches the comparators' input to one of the input channels, gets a compared value from the active channel and shows it on the corresponding LED. The comparators' digital output can also be directly monitored on the CompOut pin.

Figure 1 shows the PSoC Creator schematic for this code example.

Figure 1. Top Design Schematic

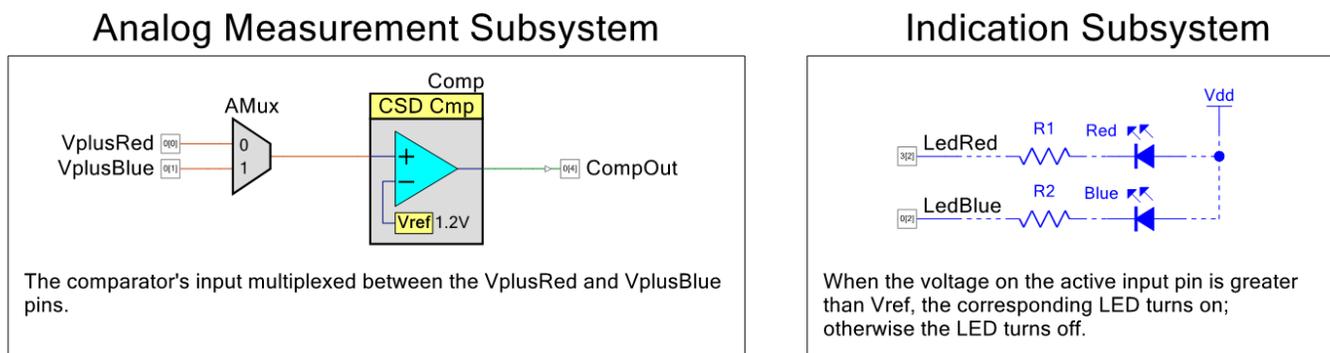

Components and Settings

Table 1 lists the PSoC Creator Components used in this example, how they are used in the design, and the non-default settings required for their proper functioning.

Table 1. PSoC Creator Components

Component	Instance Name	Purpose	Non-default Settings
1.2 Volt Comparator	Comp	To compare input voltage values to the voltage reference value.	Speed/Power: Fast/High
Analog Mux	AMux	To switch between the input pins.	AtMostOneActive: true Channels: 2
Analog Pin	VplusRed	The input pins of the Analog Multiplexer.	None.
	VplusBlue		
Digital Output Pin	CompOut	The output pin of the 1.2 Volt Comparator.	None.
	LedRed	To drive the indication LEDs,	HW Connection: Off
	LedBlue		

For information on the hardware resources used by each Component, see the Component datasheet.

Reusing This Example

This example is designed for the CY8CKIT-040 pioneer kit. To port the design to a different PSoC 4000 device, change the target device using the Device Selector and update the pin assignments in the Design Wide Resources settings as appropriate.

Related Documents

Application Notes	
AN79953 – Getting Started with PSoC 4	Introduces the PSoC 4 architecture and development tools
PSoC Creator Component Datasheets	
1.2 Volt Comparator (CSD Comp)	Provides a hardware solution to compare one input voltage with the internal 1.2 V reference
Analog Multiplexer (AMux)	Provide ability to connect analog signals to a different common analog signal
Pins	Supports connection of hardware resources to physical pins
Device Documentation	
PSoC 4: PSoC 4000 Family Datasheets	PSoC 4000 Family: PSoC 4 Technical Reference Manuals
Development Kit Documentation	
CY8CKIT-040: PSoC 4000 Pioneer Development Kit	

Document History

Document Title: CE195297 – PSoC 4000 1.2-V Comparator with Analog Multiplexer

Document Number: 001-95297

Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	5978753	MYKZTMP1	11/30/2017	New code example

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Community Forums](#) | [Projects](#) | [Videos](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

All other trademarks or registered trademarks referenced herein are the property of their respective owners.



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

© Cypress Semiconductor Corporation, 2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.