


REVISIONS					
ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
	**	50202	NEW RELEASE	05/30/97	
	*A	117739	CHANGE TITLE FROM TQFP CARRIER TAPE (14X14X1.4MM) WITH PEDESTAL TO CARRIER TAPE, TQFP 64/80/100/120 (14X14X1.4MM). CHANGE PART NUMBER FROM A14X14X1.4CTP TO A14X14X1.4CT	07/31/02	
	*B	3741673	CHANGE LOGO FROM CYPRESS SEMICONDUCTOR TO COMPANY CONFIDENTIAL	09/12/12	Z.JL

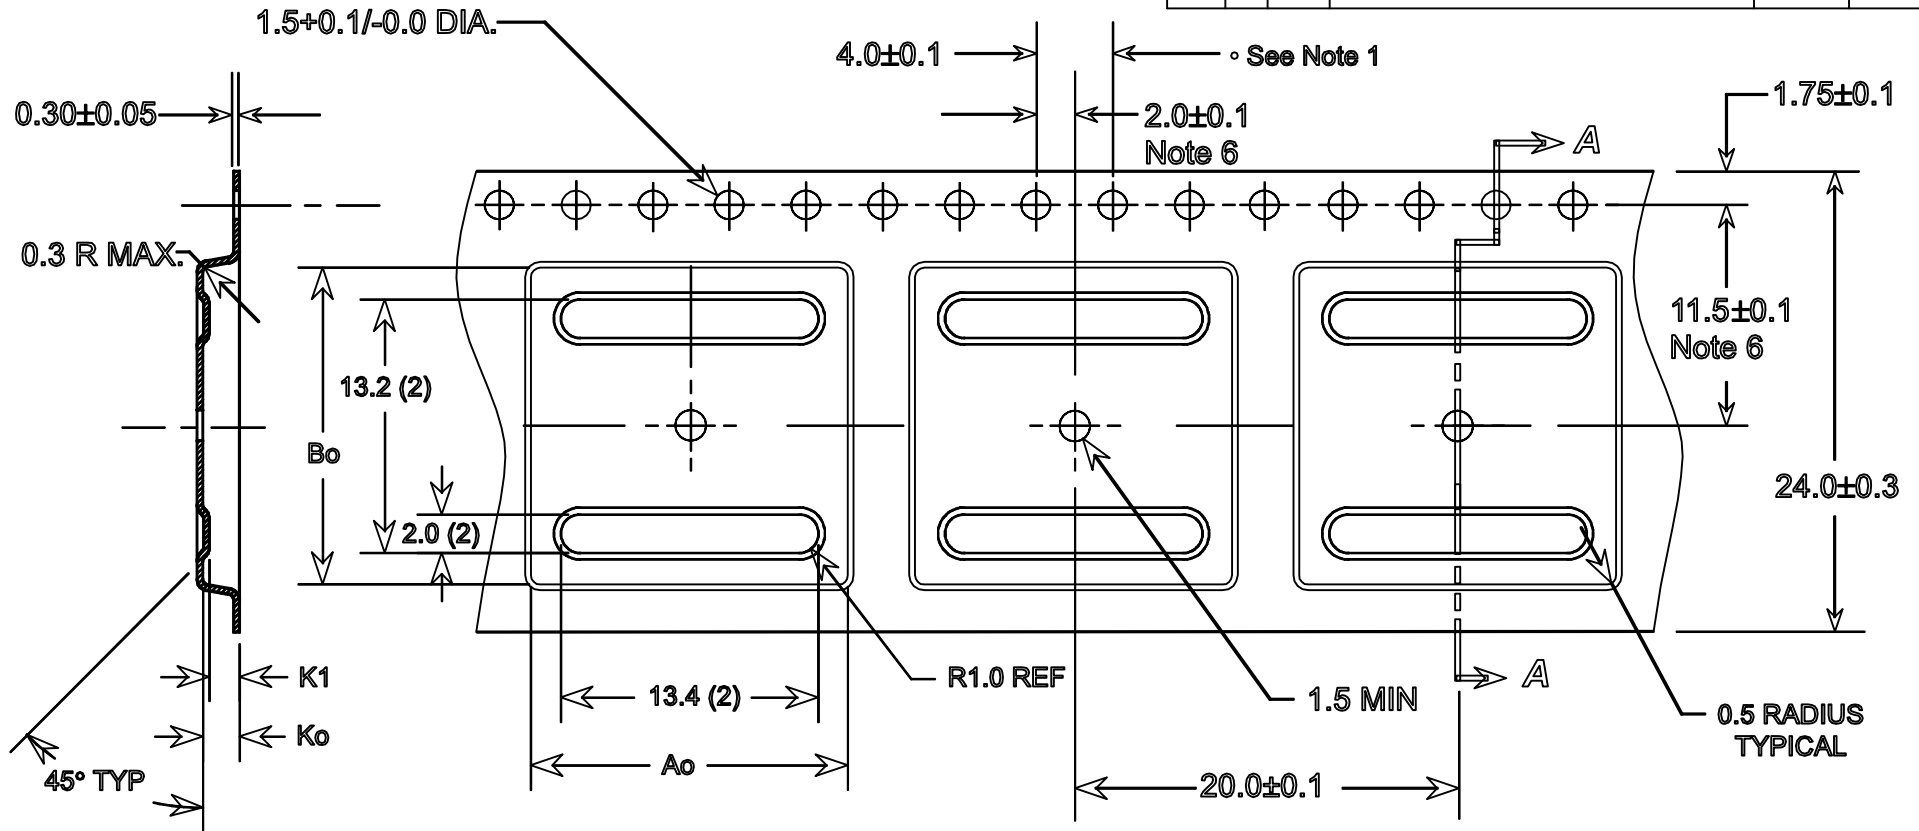

SECTION A-A

$A_o = 16.50 \text{ mm} \pm 0.1$
 $B_o = 16.50 \text{ mm} \pm 0.1$
 $K_o = 1.90 \text{ mm} \pm 0.1$
 $K_1 = 1.55 \text{ mm} \pm 0.1$

Notes:

- 10 sprocket hole pitch cumulative tolerance ± 0.2
- Camber not to exceed 1mm in 100mm
- Material: Conductive Black Polystyrene or equivalent
- A_o and B_o measured on a plane 0.3mm above the bottom of the pocket
- K_o measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- All material to conform to EIA-541 and EIA-481 standard

- All Dimensions in Millimeters -
 (2) Non-critical dimensions to reference only

UNLESS OTHERWISE SPECIFIED		DESIGNED BY	DATE		CYPRESS COMPANY CONFIDENTIAL		
ALL DIMENSIONS ARE IN INCHES STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN	DATE		TITLE		
DECIMALS	ANGLES	XVC	09/12/12	CARRIER TAPE, TQFP 64/80/100/120 (14X14X1.4MM)			
JXX ±	° ±	CHK BY	DATE	SIZE	PART NO.	DWG NO.	REV
JXXX ±		Z.JL	09/12/12	A	A14X14X1.4CT	51-51051	*B
JXXXX ±		APPROVED BY	DATE	SCALE 2.5: 1			SHEET 1 OF 1
MATERIAL		QAD	09/12/12				
SEE NOTE		KGL	09/12/12				
FINISH							