


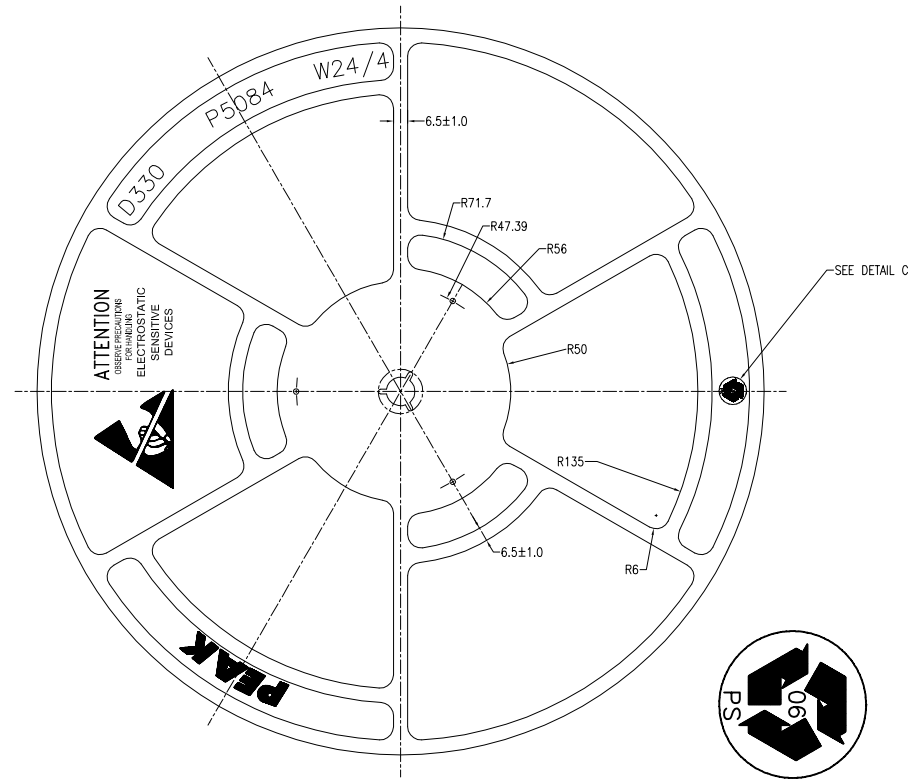
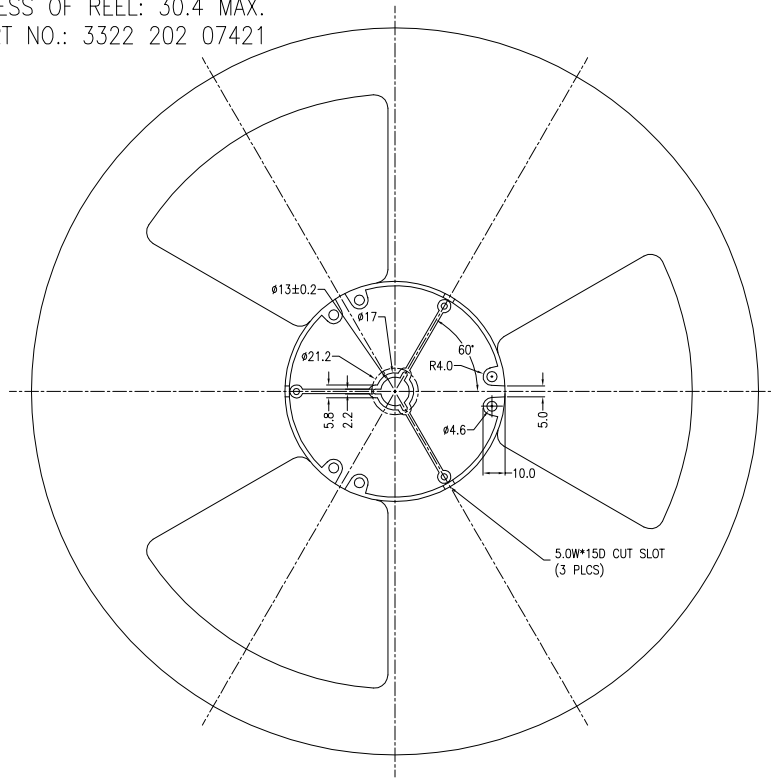


- NOTES:
1. MATERIAL : POLYSTYRENE (BLACK)
 2. ANTISTATIC COATED
 3. FLANGE WARPAGE : 3 MM MAXIMUM
 4. ALL DIMENSIONS ARE IN MM
 5. ESD - SURFACE RESISTIVITY
- 10^5 TO 10^{11} OHMS/SQ.
 6. GENERAL TOLERANCE : ± 0.25 MM
 7. TOTAL THICKNESS OF REEL: 30.4 MAX.
 8. SUPPLIER PART NO.: 3322 202 07421


REVISIONS						
PAGE	ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
1	-	**	115788	NEW RELEASE	05/15/02	
1	-	*A	303352	ADD BLACK COLOR LOCK REEL	12/21/04	
1	-	*B	3159123	CHANGE TITLE FROM REEL TAPE 4"HUB (REEL THICKNESS 30.4) TO REEL, 13INCH DIA., 24MM W X 4INCH HUB UPDATE DRAWING BASED ON SUPPLIER'S LATEST DRAWING CHANGE DRAWING TEMPLATE	02/02/11	QAD/KGL



DETAIL C
SCALE 4:1

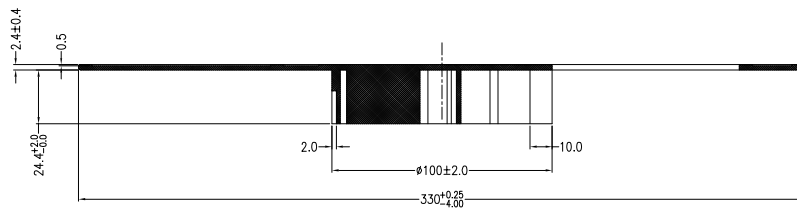

THIS DRAWING CONTAINS INFORMATION WHICH IS THE PROPRIETARY PROPERTY OF CYPRESS SEMICONDUCTOR CORPORATION. THIS DRAWING IS RECEIVED IN CONFIDENCE AND ITS CONTENTS MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT OF CYPRESS SEMICONDUCTOR CORPORATION.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS STANDARD TOLERANCES ON: DECIMALS ± 0.25 .XX ± 0.25 .XXX ±	DESIGNED BY	DATE	 CYPRESS Company Confidential
	DRAWN BY	DATE	
	CHECKED BY	DATE	
	APPROVED BY	DATE	
MATERIAL	APPROVED BY	DATE	TITLE
SEE NOTES	KGL	02/02/11	REEL, 13INCH DIA., 24MM W X 4INCH HUB
FINISH	APPROVED BY	DATE	SIZE
			A
			PART NO.
			TX24-04
			DWG NO.
			51-51152
			REV
			*B
			SCALED TO FIT
			ENG'G REV
			SHEET 1 OF 1