



Release Notes SRN065

PSoC Programmer Version 3.10.1

Release Date: November 9, 2009

Thank you for your interest in PSoC Programmer version 3.10. These release notes list the installation requirements and describe software updates and changes. This programmer release is a minor update from the PSoC Programmer 3.10 release to support the Beta 4 release of PSoC Creator v1.0.

System Requirements and Recommendations

System Requirements	Minimum	Recommended
Processor Speed	500 MHz	1 GHz
MB of RAM	64 MB	512 MB
MB of Free Hard Drive Space	200 MB	512 MB
Screen Resolution	1024x768	1280x1024
CD-ROM Drive		✓
USB Port, preferably Open Host Controller or Universal	✓	✓
Windows® 2000, XP (SP 1 or 2), or Vista 32-bit Windows 7	✓	✓
Windows .NET Framework 2.0 (32)	✓	✓
Microsoft Internet Explorer 6.0 (SP1)	✓	✓
Adobe Reader (For Viewing of .PDF Documentation)	✓	✓

Updates

PSoC Programmer is updated frequently, adding support for new devices as they appear.

Check <http://www.cypress.com/psocprogrammer> for the latest downloads of software and documentation.

New Devices for PSoC Programmer 3.10

This table lists new devices for PSoC Programmer 3.10


Device Family	Device
CY8C20xx6A	CY8C20236A
	CY8C20336A
	CY8C20436A
	CY8C20536A
	CY8C20636A
	CY8C20246A
	CY8C20346A
	CY8C20446A
	CY8C20546A
	CY8C20646A
	CY8C20266A
	CY8C20366A
	CY8C20466A

Device Family	Device
	CY8C20566A
	CY8C20666A
	CY8C20296A
	CY8C20396A
	CY8C20496A
CY8CTxx20xA	CY8CTMG200A-48LTXI
	CY8CTMG201A-48LTXI
	CY8CTMG200A-16LGXI
	CY8CTMG200A-24LQXI
	CY8CTMG200A-32LQXI
	CY8CTMG200A-48PVXI
	CY8CTMG201A-16LGXI
	CY8CTMG201A-24LQXI
	CY8CTMG201A-32LQXI
	CY8CTMG201A-48PVXI
	CY8CTST200A-48LTXI
	CY8CTST201A-48LTXI
	CY8CTST201A-16LGXI
	CY8CTST201A-24LQXI
	CY8CTST201A-32LQXI
	CY8CTST201A-48PVXI
	CY8CTST200A-16LGXI
	CY8CTST200A-24LQXI
	CY8CTST200A-32LQXI
	CY8CTST200A-48PVXI
CY8C21x34	CY8C21334-12PVXE
	CY8C21334-24PVXA
	CY8C21534-12PVXE
	CY8C21534-24PVXA
CY8C24x23A	CY8C24223A-12PVXE
	CY8C24423A-12PVXE
	CY8C24423A-12PVXA
CY8C24x94	CY8C24894-24LFXA
CY8C29x66	CY8C29466-12PVXE
	CY8C29466-12PVXA
CY8CLEDOxxxx	CY8CLEDO1D01-56LTXI
	CY8CLEDO2D01-56LTXI
	CY8CLEDO3G01-56LTXI
	CY8CLEDO4G01-56LTXI
CY8CTMA1xx	CY8CTMA120-56LFXA
CY8CTMG1xx	CY8CTMA120-56LFXA
CY8CTMA300E	CY8CTMA300E-36LQXI
	CY8CTMA300E-48LTXI
	CY8CTMA300E-49FNXI
CY8CTMA301E	CY8CTMA301E-36LQXI
	CY8CTMA301E-48LTXI
	CY8CTMA301E-49FNXI
CYONS2xxx	CYONS2010-LBXC
	CYONS2011-LBXC

Device Family	Device
CYONSFN2xxx	CYONSFN2051-LBXC
	CYONSFN2061-LBXC
	CYONSFN2151-LBXC
	CYONSFN2161-LBXC
	CYONSFN2162-LBXC
	CYONSFN2053-LBXC
CY8CTST2xx	CY8CTST241-LQI-01
	CY8CTST210-LTI-01
CY8CTMG2xx	CY8CTMG240-LQI-01
	CY8CTMG240-LTI-01
CY8CTMA3xx	CY8CTMA340-LQI-13
	CY8CTMA340-LTI-13
	CY8CTMA340-FNI-13
	CY8CTMA340-LQI-11
	CY8CTMA340-LTI-11
	CY8CTMA340-FNI-11
	CY8CTMA340-LQI-09
	CY8CTMA340-LTI-09
	CY8CTMA340-FNI-09
	CY8CTMA340-LQI-05
	CY8CTMA340-LTI-05
	CY8CTMA340-FNI-05
	CY8CTMA340-LQI-03
	CY8CTMA340-LTI-03
	CY8CTMA340-FNI-03
	CY8CTMA340-LQI-01
CY8CTMA340-LTI-01	
CY8CTMA340-FNI-01	
CY8CTMA341-LQI-01	
CY8CTMA341-LTI-01	
CY8CTMA341-FNI-01	
CY8C3xxx	Complete family listing. (100+ devices)
CY8C5xxx	Complete family listing. (100+ devices)

New for PSoC Programmer 3.10

New PSoC Programmer 3.10 features.

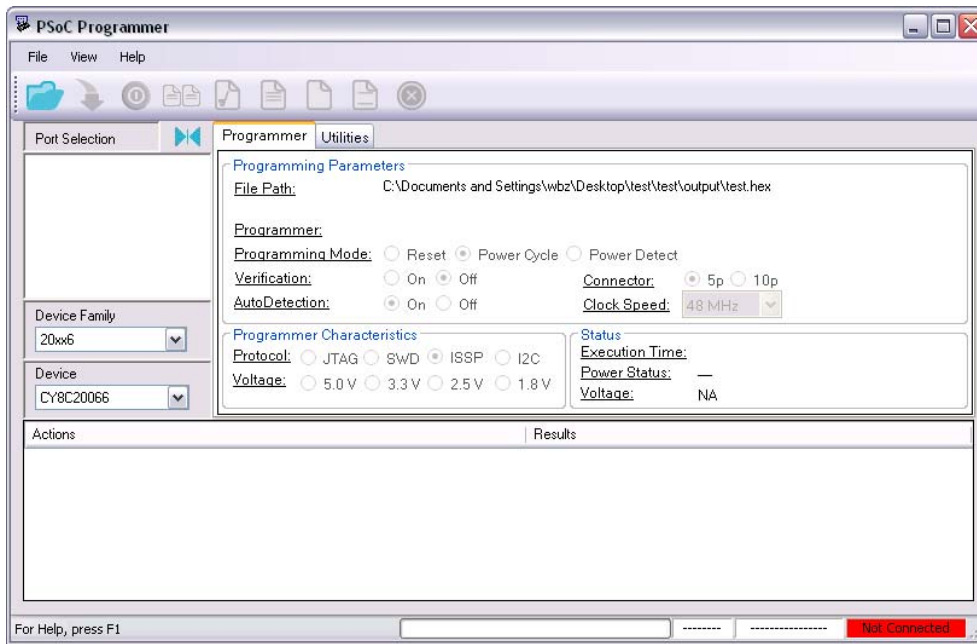

- PSoC Programmer supports new PSoC3 devices in addition to new and existing PSoC1 devices.
- PSoC Programmer 3.10 integrates the new Minipro3 development tool
- PSoC Programmer supports new features of Minipro3 through new GUI features.
- PSoC Programmer provides user interface for selecting Minipro3 supply voltages. The voltages are 1.8V, 2.5V, 3.3V, 5.0V and no power.
- Minipro3 supports JTAG, SWD, ISSP programming and I2C protocols.
- The Minipro3 can read the target board voltage and display that value to PSoC Programmer.
- Adjust the Minipro3 clock speed.
- Minipro3 has signed (32 and 64 bit) Windows XP and Vista drivers.
- PSoC Programmer 3.10 supports the CY3240 USB-I2C Bridge tool and the Minipro3 I²C capabilities from the COM level.
- New Patch programming feature allows you to program serial and calibration values into flash blocks you specify.
- PSoC Programmer is supported by the CyInstaller, which reduces the total PSoC Programmer installer size.
- Included in this release are numerous defect fixes from PSoC Programmer 3.06.


For more information regarding new features and detailed functionality please see the PSoC Programmer 3.10 COM, PPCLI and User Guides.

Bridge Control Panel v1.0

The Bridge Control Panel v1.0 has been released to production status. The PSoC Programmer 3.06 release included a live beta of the Bridge Control Panel. In the RTM release PSoC Programmer 3.10 includes numerous beta defect fixes.

The Bridge Control Panel is a migration of the old USB-I2C Bridge software shipped with CY3240 kits. This release of the Bridge Control Panel includes a GUI migration with a few minor updates. The Bridge Control Panel supports the following:

- USB-I2C serial debugging interface and charting software.
- Hardware support for the CY3240 and the Minipro3 USB-I2C Bridge capabilities.
- I2C Bootloader utility, located under the menu 'Tools'.
- Numerous example projects contained in the root installation directory.

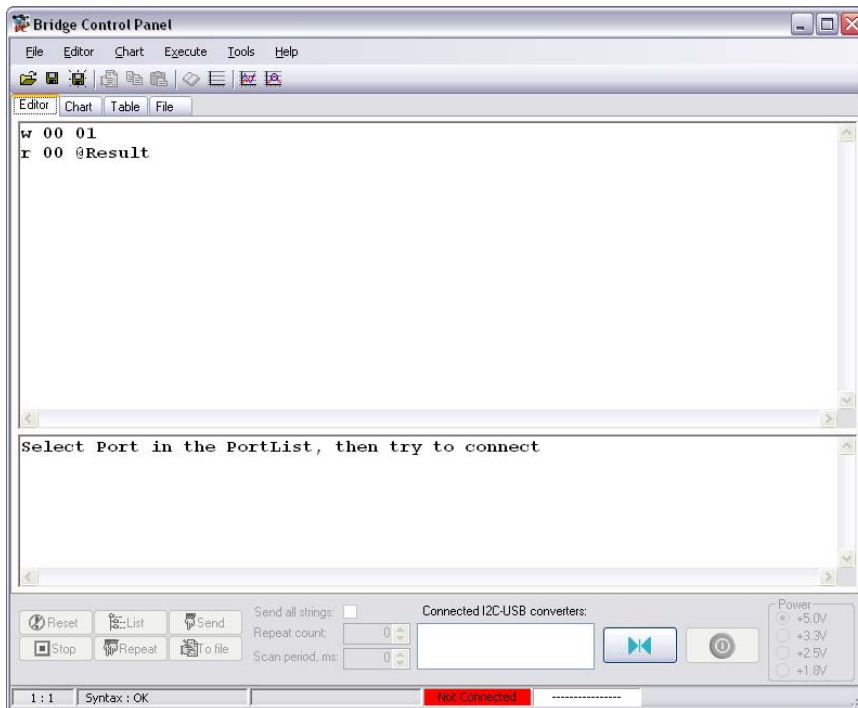

Bridge Control Panel Beta Installation


PSoC Programmer 3.06 included a live beta release of the Bridge Control Panel v1.0. If you wish to use the production version of the Bridge Control Panel v1.0, shipped with PSoC Programmer 3.10, you must first uninstall all existing versions of PSoC Programmer 3.06.

Cypress does not support Beta and Production version of the same software on the same computer. There are conflicts that could arise and we highly suggest that customers fully uninstall PSoC Programmer 3.06 prior to installing any version of PSoC Programmer 3.10 in order to use the production release of the Bridge Control Panel v1.0.


CyInstaller

New for PSoC Programmer 3.10 is the CyInstaller. CyInstaller performs installation, un-installation and update operation for a given Cypress software product.


You begin by clicking the CyInstaller executable. The installer checks the system to ensure minimum requirements are met. If critical requirements are missing CyInstaller identifies which requirements are needed.

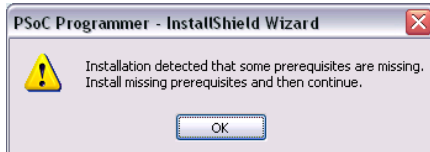


CyInstaller displays which element is missing.

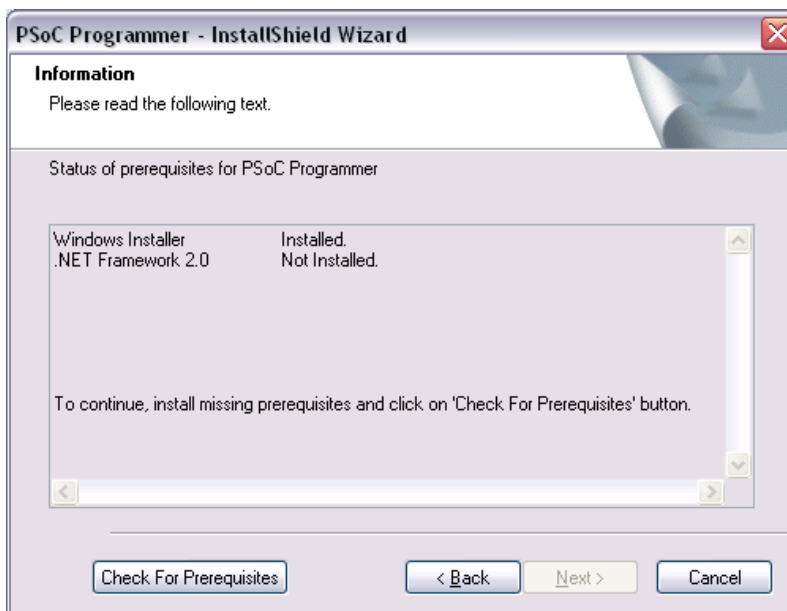


CyInstaller opens a browser window for you to download and install the prerequisite components. Click *Download* and install the program.

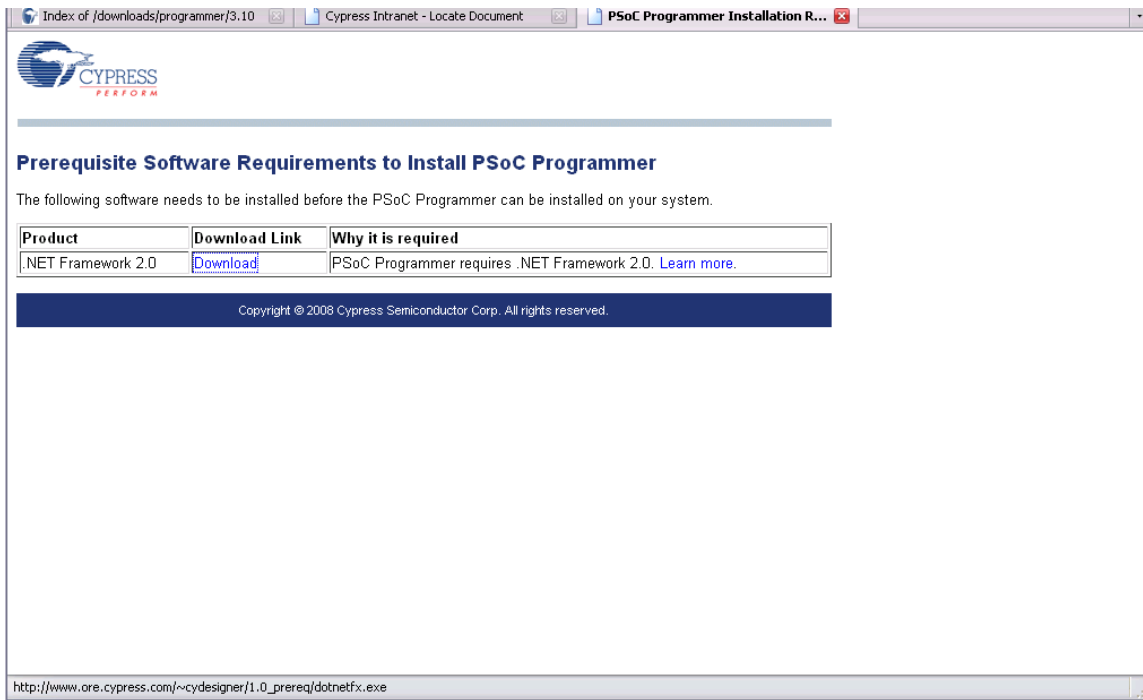

After installing the prerequisites, click “Check for prerequisites”. CyInstaller should have all the prerequisites labeled as “Installed”.

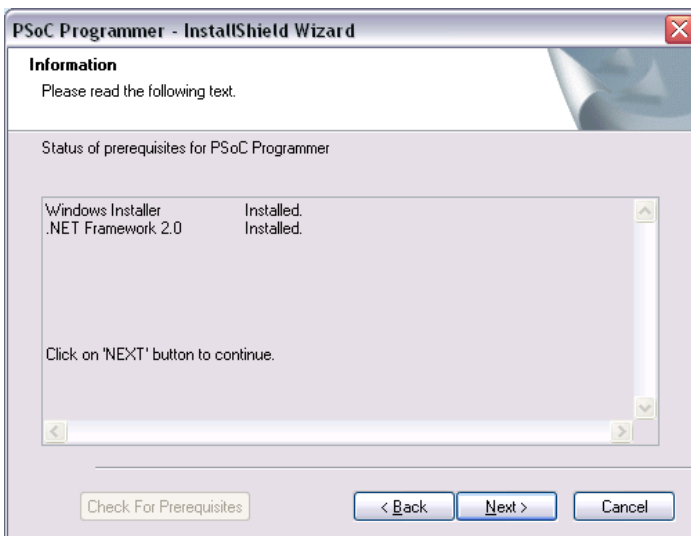


Click “Next” and the CyInstaller installs CyInstaller.

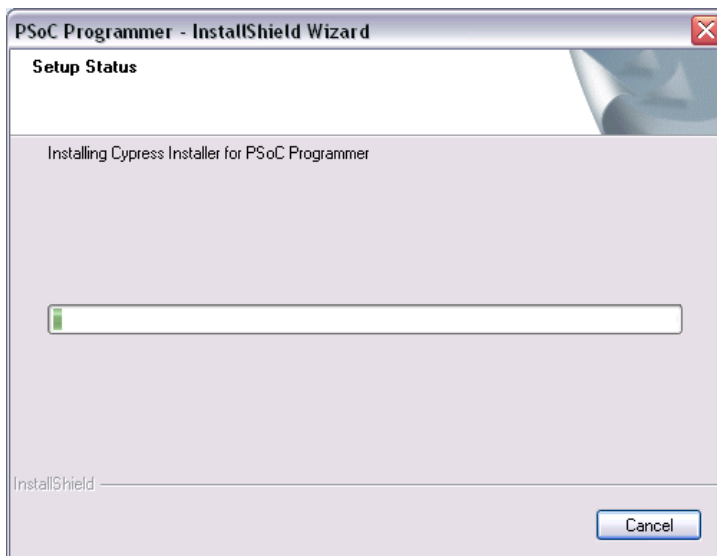


After the installation is complete CyInstaller opens and prompts you to begin the PSoC Programmer installation options.




You are offered a number of options when installing PSoC Programmer. Select the desired option and click **Next**.

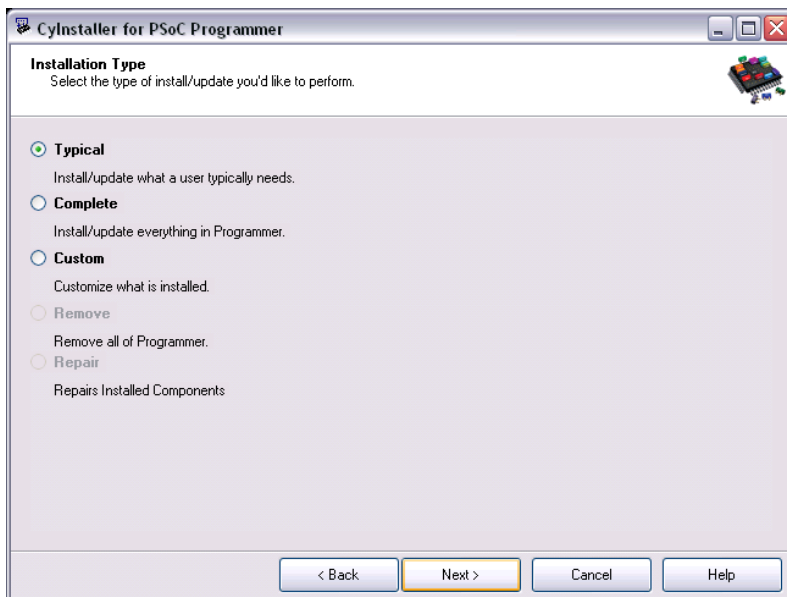

CyInstaller begins downloading and installing PSoC Programmer.

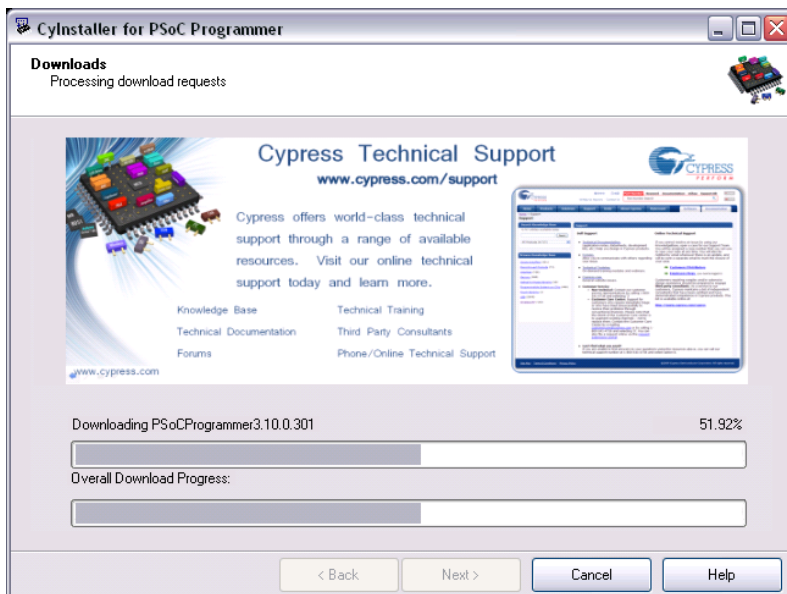

At the end of installation you are prompted to install the Device drivers for the supported programmers. In Windows Vista the Device Driver Installation Wizard does not pop to the front during installation and instead blinks in the task bar.

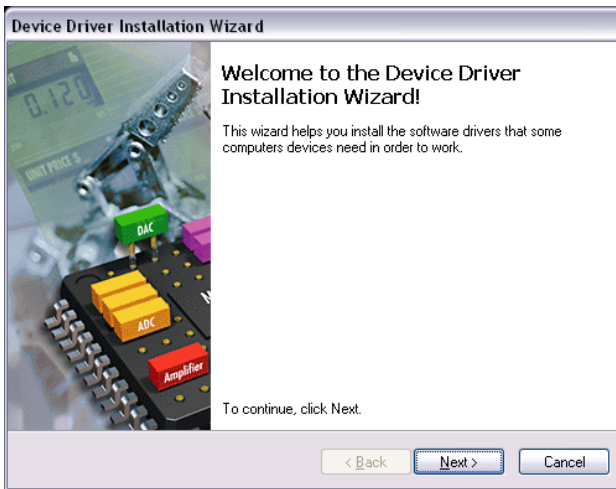

After the drivers are installed CyInstaller completes the installation process.

For additional information please go to the PSoC Programmer web page, www.cypress.com/psocprogrammer.

Miniprogram1 and Miniprogram3 Firmware Update

PSoC Programmer 3.10 supports a firmware upgrade for Miniprogram1 and Miniprogram3. This revision of the firmware has been updated to support the CY8CTMA30xE devices.

PSoC Programmer 3.10 Known Problems and Solutions

The following section details the current outstanding defects for the release of PSoC Programmer 3.10. The Defects are detailed and available work arounds are given.

Problem	Solution	Expected Fix
Windows failures have been seen with the CY3240 USB-I2C Bridge. Failures are seen when connecting a second instance of the Bridge and then disconnecting the second instance.	Have one USB-I2C Bridge connected at one time. This is a hardware limitation.	None
The CY3240 USB-I2C cannot be upgraded through PSoC Programmer or Bridge Control Panel.	There are no updates and will be no updates to the CY3240 Bridge. Equal functionality is provided with the Miniprogram3 USB-I2C Bridge capabilities.	None
The CY3240 USB-I2C Bridge fails to work with CY8CTMx30xE devices.	This is a known issue with the CY3240 USB-I2C Bridge. There are no updates and will be no updates to the CY3240 Bridge. Equal functionality is provided with the Miniprogram3 USB-I2C Bridge capabilities.	None
Programming fails when First Touch Kit 3 or Miniprogram1 are removed while another First Touch Kit or Miniprogram1 is programming.	This issue is not reproducible. To avoid this issue, do not remove programmers while another programmer is programming a device.	Not a reproducible issue.

Problem	Solution	Expected Fix
If the Minipro3 clock is set to greater than 1/3 of the chip bus clock speed, The Programming/Debugging may fail and an error message will be displayed.	For reliable results, the Minipro3 clock should not be set to greater than 1/3 of the chip bus clock. The maximum programming/debugging speed is dependent upon the CFGSPEED NVL setting (12MHz or 48MHz)	None
With PPCLI you may see a glitch on the optional XRES pin while accessing NVL with the Minipro3	0x05 should be written to the register address 0x500A before accessing NVL	Next revision
When optional XRES is enabled, Read/Verify features may not work with the Minipro3	Connecting an external pull-up resistor (Vcc) to the optional XRES pin may fix this problem	Next revision
When you supply an external power source to the target device, Power Cycle programming mode should not be used.	Please use Reset programming mode when supplying external power to the target device.	None
If after programming using Reset programming mode you do not remove the applied power and attempt to program the device using Power Cycle you will see programming irregularities.	Please cycle power on the target device and remove the external power supply before programming with Power Cycle mode.	None
Minipro3 rev5 and rev6 are Beta programmers and will not be supported in the future.	An outdated programmer will be detected by PSoC Programmer and a message will be displayed that this revision of the Minipro3 is no longer supported. Please navigate to the following web page to purchase the latest version of the Minipro3: www.cypress.com/go/cy8ckit-002	None
A small quantity of Minipro3 revision *A programmers were shipped with outdated firmware. If the firmware is not updated the Minipro3 will not function with the CY8CTMA300xE devices.	PSoC Programmer will detect that the firmware is out of date. Please navigate to the Utilities tab and click the Update Firmware version. After the firmware is updated the Minipro3 will be fully functional.	Manual S/W updates using online Knowledge Based Article .
Minipro3 has been seen to fail when programming the CY7C638xx devices.	Please use Minipro1 instead.	Next software release.

Increasing the Minipro1 Programming Times

MiniProg1 programmer hardware has a low-speed USB interface. If you use a USB2.0 Hub between the computer, running PSoC Programmer and the MiniProg1, the overhead in USB transactions is greatly reduced. Subsequently the programming time for the PSoC device is reduced by 30%. Dlink and Belkin USB2.0 Hubs were used to verify this behavior.

PSoC Programmer 3.10 allows you to turn off the verification procedure of the programming algorithm. If you turn off verification and use a high-speed USB hub you may see overall reductions of 40-50% in programming time. The programming algorithm uses a checksum calculation for verification. This feature is intended to shorten programming times in an engineering setting and not intended for manufacturing use.

Device Driver Re-Installation

During installation of PSoC Programmer you are prompted to install the device drivers for PSoC Programmer. If you clicked “Cancel” originally, and now you want to re-install the drivers, please do the following:

Navigate to the PSoC Programmer root installation directory.

Open the *Drivers* folder.

And Run the *driver.bat* file. This installs the PSoC Programmer drivers.

Programmer Limitations

- You must change the programming mode manually using the provided radio buttons.
- After one Programmer instance is opened on a USB port, it holds the original port even if it is unplugged and moved to another port. This prevents another instance from using the original port. Closing and reopening the first instance resolves this.
- There is no programming support for wafer sale parts.
- When programming verification fails, the specific failing location(s) are not indicated.
- ICE4000 is no longer supported in PSoC Programmer.
- When using the ICE-Cube or MiniProg1 for programming, PSoC Programmer applies 3.3V to the XRES pin during connection. This may cause power to be applied to the target system. During programming, 3.3V is applied to the target system's SCLK(P1-1), SDATA (P1-0), and XRES pins.
- The MiniProg1 programmer does not support CY8C25/26xxx parts.
- A very infrequent USB connection issue notifies you that an unknown device was detected when a MiniProg is plugged in. Unplugging the MiniProg1 and then reconnecting it solves this issue.
- PSoC Programmer may experience “Can't Acquire Device” errors for CYRF69103-40LFXC. There have been intermittent reports of “Can't Acquire Device” errors, which may be individually chip dependent. Programming another device clears the problem.
- The port selection window does not display port information if the port string is wider than the text window.
- If you select the Fixed Reminder option, please know that there may not be an update for PSoC Programmer currently available. Please reset the reminder interval under the Fixed Reminder, switch to an automatic web update, or disable the update reminder. Close and restart PSoC Programmer to reset the notification in the banner and in the status window.
- CY3210-MiniProg1 may have two capacitors soldered onto the SCL and SDA programming lines causing failures during programming. To remove these capacitors, please contact Cypress technical support for additional steps in addressing this issue.

Documentation

Documentation is available in the PSoC Programmer Root Directory under Documents. The documents include *Programmer User Guide*, *PSoC Programmer COM Interface Guide*, and *PSoC Programmer Command Line Interface Guide*.



For additional assistance go to <http://www.cypress.com> or contact our Application Team at 425.787.4814.

PSoC Training

First time users should visit www.cypress.com/training for access to free comprehensive PSoC training modules.

Silicon Errata

The most up-to-date versions of the silicon errata are available on the web site at <http://www.cypress.com/psoc> and navigating to Errata Update → PSoC Mixed-Signal Array.

For assistance go to <http://www.cypress.com> or contact our Applications Team at 425.787.4814.



Cypress Semiconductor
198 Champion Ct.
San Jose, CA 95134-1709 USA
Tel: 408.943.2600
Fax: 408.943.4730
Application Support Hotline: 425.787.4814
www.cypress.com

© Cypress Semiconductor Corporation, 2009. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC Designer™, Programmable System-on-Chip™, and PSoC Express™ are trademarks and PSoC® is a registered trademark of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

This Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.
